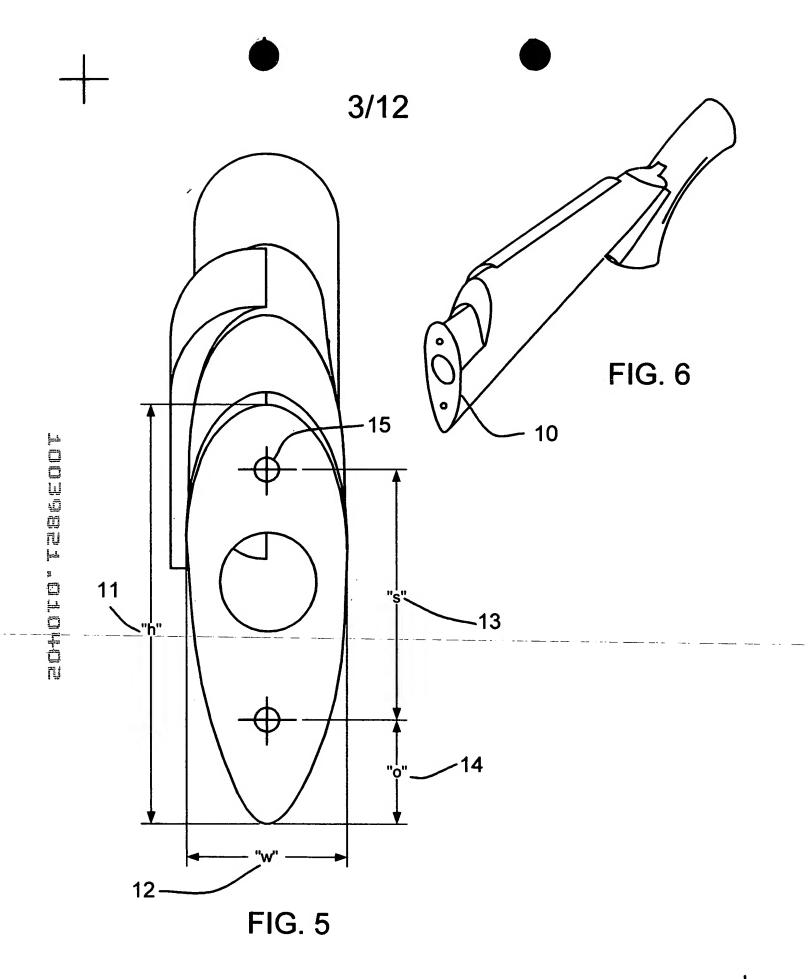


\_\_\_




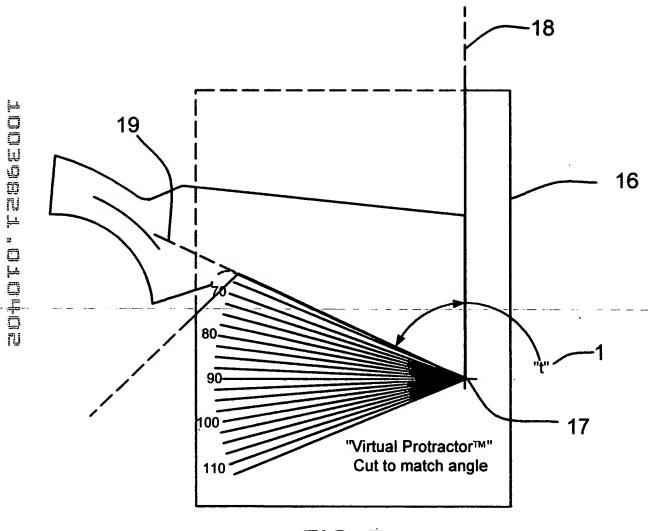


FIG. 7

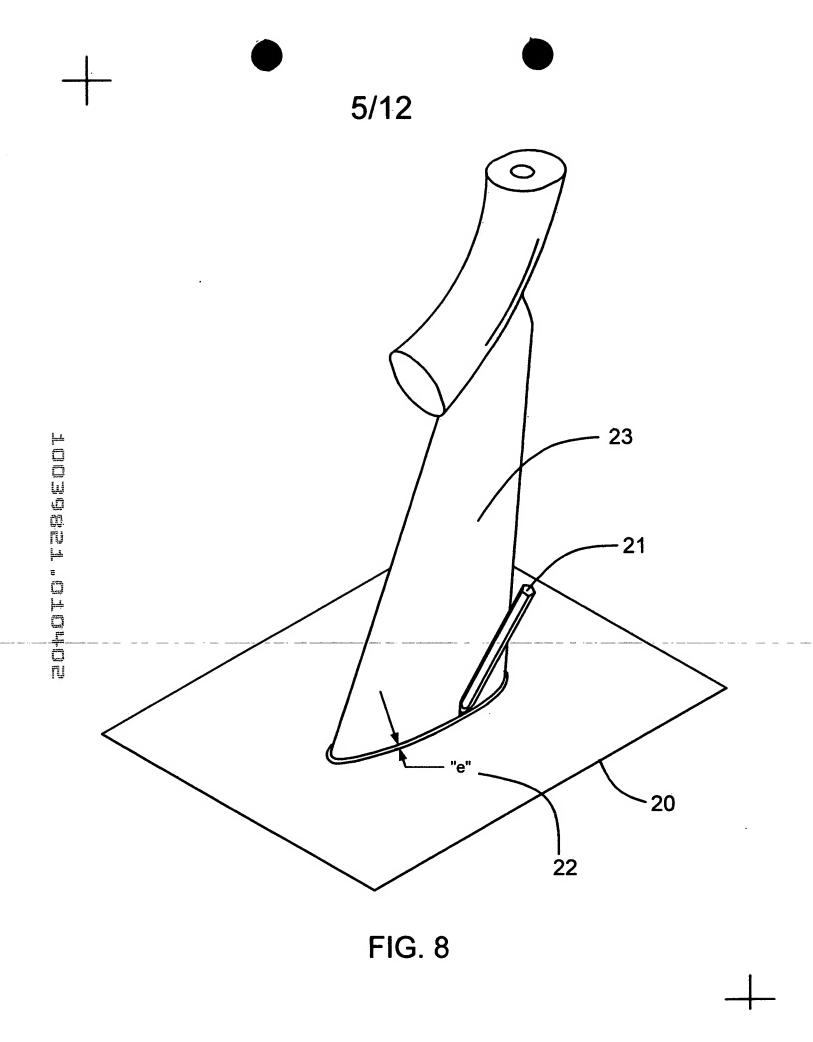

## DIMENSIONAL DATA measured accurately from stock) Bottom "toe" Angle, Pro-Fit® Recoil Pads 6/12 Ö

Copyright December 2000, Eclectic Technologies Inc. Data Aquisition Form © Profile & Parametric , Farmington CT

## Note:

measuring tools, use EclecTech's Print-on-Paper Virtual-Protractor® & Virtual-If you do not have real Scale®

to accurately determine dimensions

Ö

وَ

1 division = 125 Inch **Grid Scale:** 

Profile & Screw Hole Locations Here \* Use fine tip pen or pencil to minimize distance from the center of the traced tracing offset error "O", which is the line to the actual edge of the stock) Accurately Trace Stock

inches inches inches Specify Desired Fit with Stock (check one) Estimated Trace Offset **Bottom Screw Position** op "heel" Angle, Maximum Length, Maximum Width, Screw Spacing,

inches\*\* larger than stock ☐ Oversize, Specify\_

☐ Exact Fit, Flush with Stock

inches\*\* smaller than stock \*\* Distance is offset from edge, not overall size. ☐ Undersize, Specify

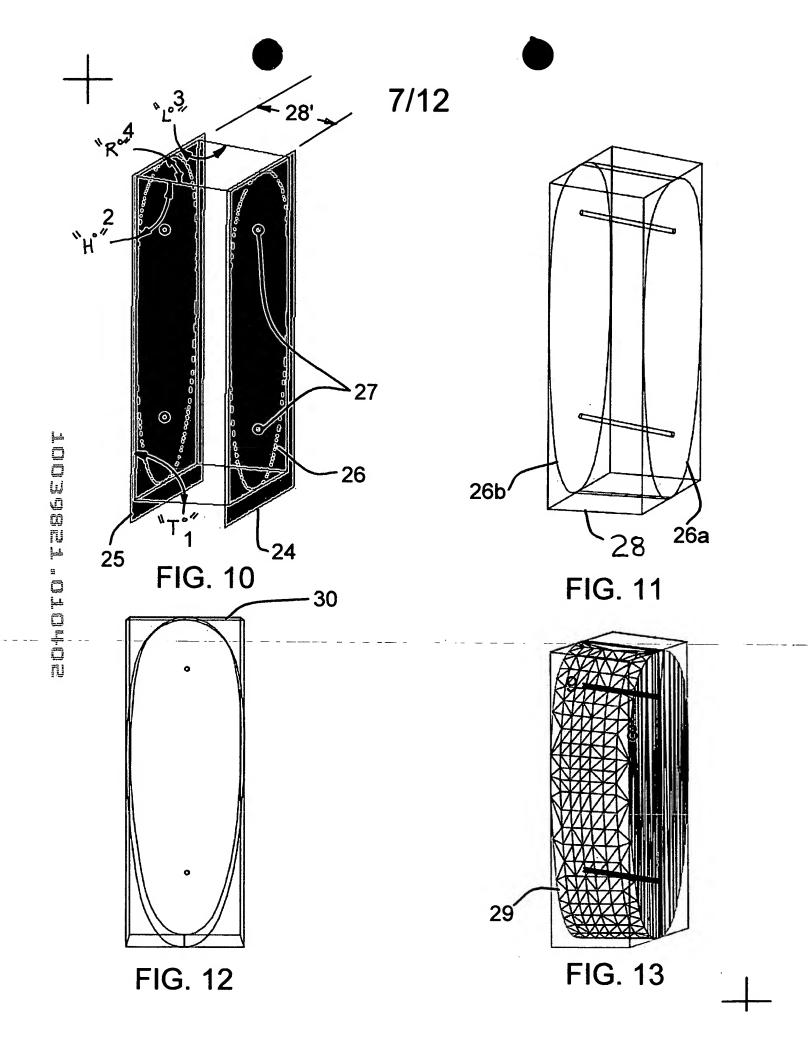


FIG. 14

32

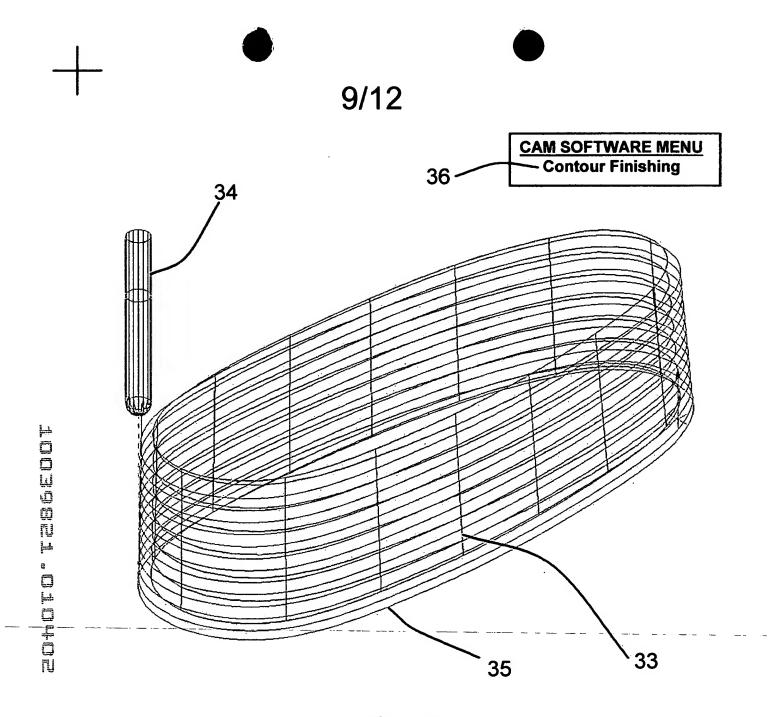



FIG. 15

11/12

## Dimensional Data:

Measure Length to nearest 1/16 inch

Measure Diameter in 1/1000 inch

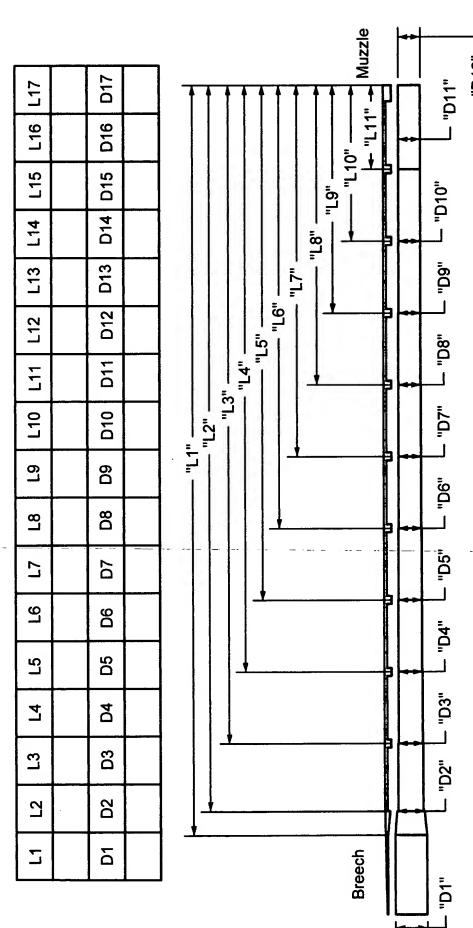

Pro-Fit™ Ventilated Shotgun Rib "D12" Parametric Data Aquisition Form © Copyright December 2000,

Eclectic Technologies Inc., Farmington CT